



## UltraLift 2 - UL2 Series 10,000-22,000


UltraLift-2 "UL2" Model polyethylene tanks designed and manufactured by HydroHoist are highly resistant to impact or low-water damage. Flexing when stressed, the tanks then return unharmed to their original shape! And, all the steel parts are above the water in standard installations. A completely new concept in the boat lifting industry to defy rust, corrosion, and the elements, and protecting your boat for years of convenient and care-free storage.

### Recommended For:

- Boats up to 22,000 lbs.
- Boats up to 47' Overall Length
- Floating Docks and
- U-Shaped Slips


### Standard Features:

- Precision-Designed & Custom-molded High-impact Polyethylene Tanks
- All Steel Above The Water Line in standard installations.
- Full-width 5" Frame Channel with 5" Adjustable Expansion Channel
- Heavy-duty 3" Torsion Bars
- Boat-Side Padded Step Pitman's in standard installations.
- Five-inch Ultra-high Molecular Weight Square Hole Bushings
- Two-piece Urethane/Stainless Steel Pivot Bushings
- Heavy-duty Hull Support System
- Grade-8 pivot hardware
- Heavy-duty construction

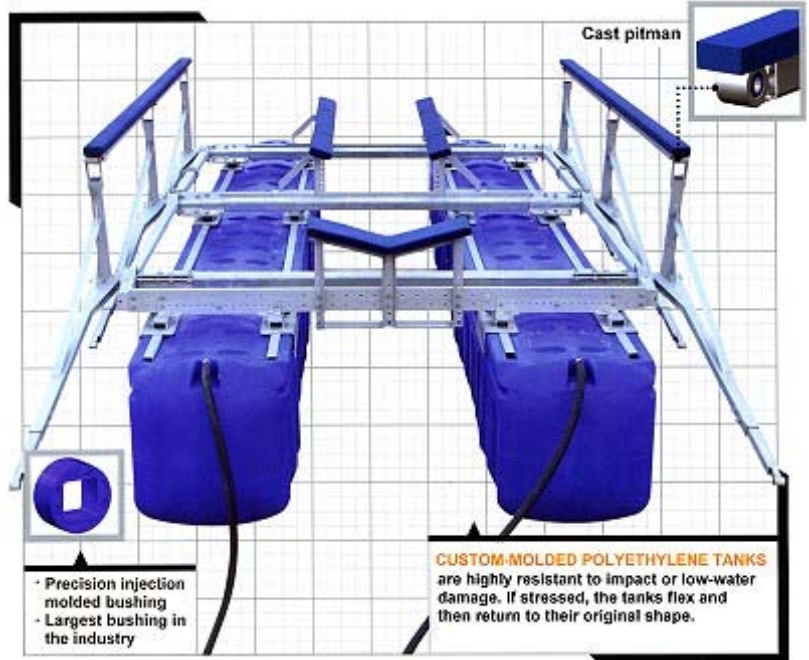

### TECHNICAL SPECS

5-20-08

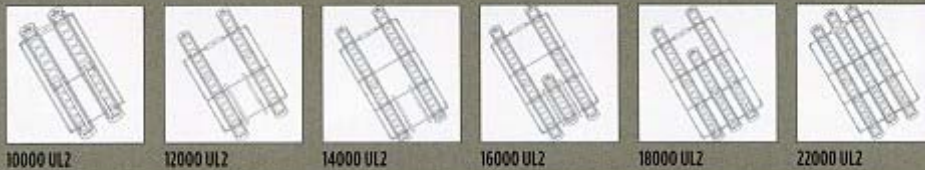

ULTRALIFT <sup>2</sup> ™ UL <sub>2</sub> SERIES SPECIFICATIONS	LIFTING CAPACITY	# OF ARMS	MIN. SLIP WIDTH	MAX. SLIP WIDTH	NUMBER OF TANKS	TANK SIZE
10000UL2	10,000 lbs.	4	10.0 ft.	18.0 ft.	2	36" x 32" x 20'
12000UL2	12,000 lbs.	6	10.0 ft.	18.0 ft.	2	36" x 32" x 24'
14000UL2	14,000 lbs.	6	10.0 ft.	18.0 ft.	2	36" x 32" x 28'
16000UL2 Short	16,000 lbs.	6	12.0 ft.	18.0 ft.	2	36" x 32" x 24'
					1	36" x 32" x 16'
16000UL2 Long	16,000 lbs.	6	12.0 ft.	18.0 ft.	2	36" x 32" x 28'
					1	36" x 32" x 12'
18000UL2	18,000 lbs.	6	12.0 ft.	20.0 ft.	2	36" x 32" x 28'
					1	36" x 32" x 20'
22000UL2	22,000 lbs.	6	13.0 ft.	20.0 ft.	3	36" x 32" x 28'

