



UltraLift 2 - UL2 Series 4400-8800


UltraLift-2 "UL2" Model polyethylene tanks designed and manufactured by HydroHoist are highly resistant to impact or low-water damage. Flexing when stressed, the tanks then return unharmed to their original shape! And, all the steel parts are above the water*- a completely new concept in the boat lifting industry- to defy rust, corrosion, and the elements, and protecting your boat for years of convenient and care-free storage.

Recommended For:

- Boats up to 8,800 lbs.
- Boats up to 28' Overall Length
- Floating Docks and U-Shaped Slips

Standard Features:

- Precision-Designed & Custom-molded High-impact Polyethylene Tanks
- All Steel Above The Water Line
- Full-width 4" Frame Channel with 3" Adjustable Expansion Channel
- Heavy-duty 1/4" Torsion Bars
- Boat-Side Padded Step Pitman's
- Five-inch Ultra-high Molecular Weight Square Hole Bushings
- Two-piece Urethane/Stainless Steel Pivot Bushings
- Heavy-duty Hull Support System
- Grade-8 pivot hardware
- Heavy-duty construction

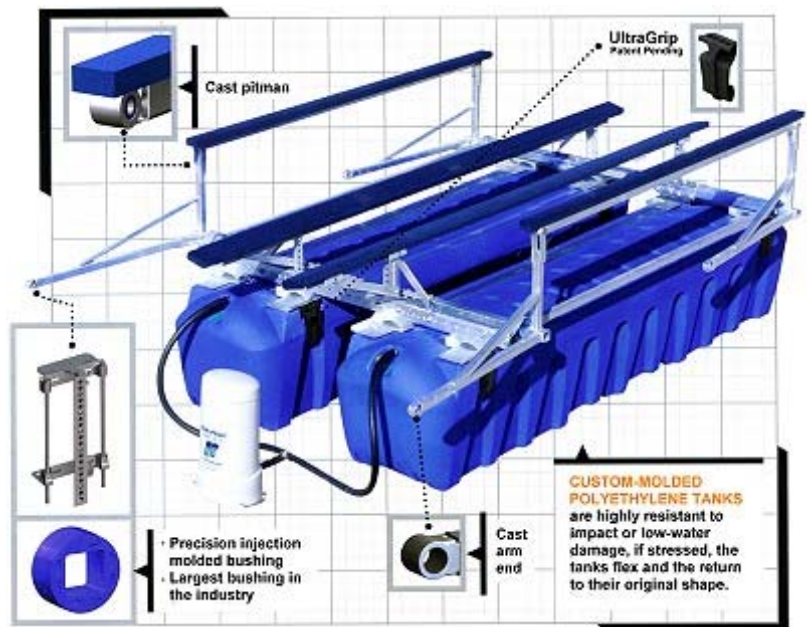

TECHNICAL SPECS

5-20-08



4400 UL2



6600 UL2



6600-3 Tank-UL2



8800 UL2



ULTRALIFT ² UL ₂ SERIES SPECIFICATIONS	LIFTING CAPACITY	MIN. WATER DEPTH	MIN. SLIP WIDTH	MAX. SLIP WIDTH	NUMBER OF TANKS	TANK SIZE
4400 UL2	4,400 lbs.	4 ft.*	8.0 ft.	16.0 ft.	2	24" x 32" x 13.5'
6600 UL2	6,600 lbs.	5 ft.**	8.0 ft.	16.0 ft.	2	32" x 32" x 13.5'
6600 3T UL2	6,600 lbs.	4 ft.*	10.0 ft.	16.0 ft.	3	24" x 32" x 13.5'
8800 UL2	8,800 lbs.	5 ft.**	8.0 ft.	16.0 ft.	2	32" x 32" x 17.5'

*30 inches plus boat hull draft

**38 inches plus boat hull draft